

# RSC-2KT



## Features :

- High-density design for space saving
- Hot swap design for maintenance and management
- Support 8x12Gb/s 3.5" hot swap drive bays
- Support 4x12Gb/s 2.5" OS drive, 2x12Gb/s 2.5" OS drive with 1x slim CD-Rom option
- Tool-less drive trays
- Support single and redundant power supplies
- 7 x low profile slots
- Front access USB 3.0 port

## SPECIFICATIONS

|                                  |                                                                     |               |   |
|----------------------------------|---------------------------------------------------------------------|---------------|---|
| <b>Dimensions</b><br>(W x D x H) | mm : 430 x 680 x 88                                                 |               |   |
|                                  | inches : 17 x 26.8 x 3.5                                            |               |   |
| <b>Industry Standard</b>         | EIA-RS310D                                                          |               |   |
| <b>Material</b>                  | Heavy-duty preplated SPGC cold-rolled steel                         |               |   |
| <b>Color</b>                     | Front Panel : Black                                                 |               |   |
| <b>Cooling</b>                   | Standard :<br>3 x 80x38mm PWN & low-power consumption hot swap fans |               |   |
| <b>Power Supply</b>              | 550W or 800W 1+1 redundant<br>Option: 400W or 650W single           |               |   |
| <b>Expansion Slots</b>           | 7 low profile                                                       |               |   |
| <b>Front Panel</b>               | System power on/off and system reset , USB 3.0 port                 |               |   |
| <b>LED Indicators</b>            | Power, LAN, Drive and Alert                                         |               |   |
| <b>System Board</b>              | 12"(W) x 13"(D) EATX MB                                             |               |   |
| <b>Drive Bays</b>                | External                                                            | 3.5" hot swap | 8 |
|                                  | Internal                                                            | 2.5"          | 4 |
|                                  | Peripheral Drive                                                    | Slim DVD-ROM  | 1 |

|                             |                                             |                             |
|-----------------------------|---------------------------------------------|-----------------------------|
| <b>Backplane</b>            | 4-port with SFF-8643 connector supports 12G |                             |
| <b>Storage Temperature</b>  | 0°C(32°F) ~ 50°C(122°F)                     |                             |
| <b>Humidity</b>             | 5%~95% non-condensing                       |                             |
| <b>Gross Weight</b>         | (w/ PSU & Rail)                             | kgs :                       |
|                             |                                             | lbs :                       |
| <b>Packaging Dimensions</b> | (W x D x H)                                 | mm : 590 x 885 x 288        |
|                             |                                             | inches : 23.2 x 34.8 x 11.3 |

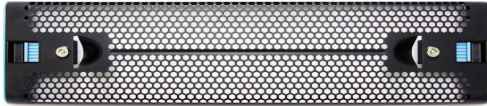
FRONT VIEW



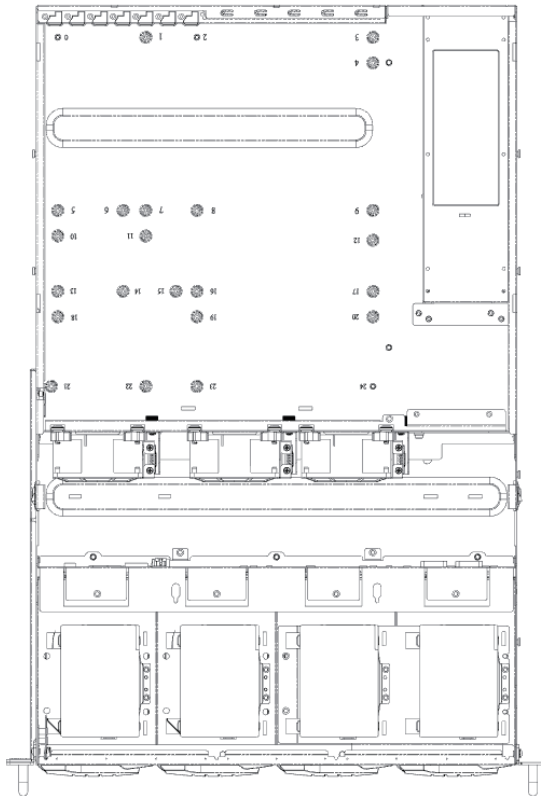
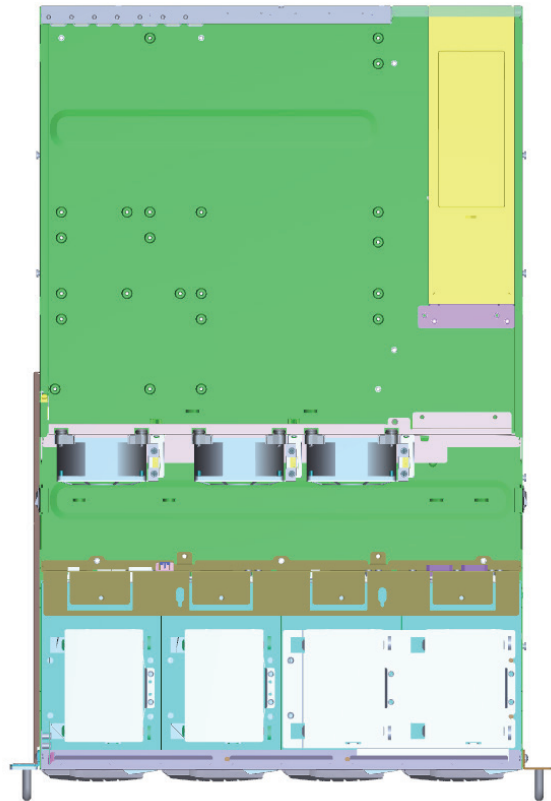
REAR VIEW



550W or 800W 1+1 redundant  
Optional - 400W or 650W single



Optional Item – Front Bezel

**4\*2.5HDD****2\*2.5HDD with Slim CD rom**

*Power supply is included. Motherboard is not included.*