



### Features

- Tool-less design supports quick installation and easy maintenance:
  - Tool-less 3.5" & 2.5" drive trays
  - Tool-less top covers
  - Tool-less backplane
  - Tool-less slide rails
- 12Gb/s SAS3 / 24Gb/s SAS4 expander chip
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 3.5" drive tray comes with 4 screw holes to adapt to 2.5" drive
- 36 (24 front + 12 rear) bays to provide high-density storage in a 4U server chassis
- 2.5" SATA or NVMe hot swap as OS/Cache/Tiering storage
- Comes with a redundant PSU 80+ Platinum
- Two front access USB 3.0 ports

### Front View



Optional item - Front door

### Rear View





### Specifications

<b>Dimensions</b> (W x D x H)	mm : 430 x 680 x 174.3		
	inches : 16.9 x 26.8 x 6.9		
<b>Industry Standard</b>	EIA-RS310D		
<b>Material</b>	Heavy-duty preplated SGCC cold-rolled steel		
<b>Color</b>	Front Panel : Black		
<b>Cooling</b>	6 x 80x38mm PWM & low-power consumption hot swap fans		
<b>Power Supply</b>	1200W 1+1 redundant PSU PMBus 1.2 80+ Platinum		
<b>Expansion Slots</b>	7 low profile		
<b>Front Panel</b>	System power on/off, system reset, system ID and 2 x USB 3.0 ports		
<b>LED Indicators</b>	Power, LAN, Drive, ID and Alert		
<b>System Board</b>	12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB		
<b>Drive Bays</b>	External	3.5" hot swap	36 (24 front + 12 rear) • 24 x SATA/SAS3/SAS4 • 12 x SATA/SAS3/SAS4/NVMe
		2.5" hot swap	2 (7mm)

<b>Backplanes</b>	<ul style="list-style-type: none"> <li>• SKUA: 1 x 24-port SAS3 expander backplane + 1 x 12-port SAS3 expander backplane</li> <li>• SKUB: 1 x 24-port SAS3 expander backplane + 2 x 4-port SAS3 / PCIe Gen4 NVMe tri-mode backplane + 1 x 4-port SAS3 backplane</li> <li>• SKUC: 1 x 24-port SAS4 expander backplane + 1 x 12-port SAS4 expander backplane</li> </ul>	
<b>Storage Temperature</b>	0°C(32°F) ~ 50°C(122°F)	
<b>Humidity</b>	5%~95% non-condensing	
<b>Gross Weight</b>	(w/ PSU & Rail)	kgs : 40.4
		lbs : 89
<b>Packaging Dimensions</b>	(W x D x H)	mm : 645 x 835 x 310
		inches : 25.3 x 32.8 x 12.2
<b>Cubic Feet</b>	8.3	
<b>Container Load Quantity</b>	20'	120
	40'	245
	40' H	285
<b>Mounting</b>	Standard	28" tool-less slide rail



## Top View

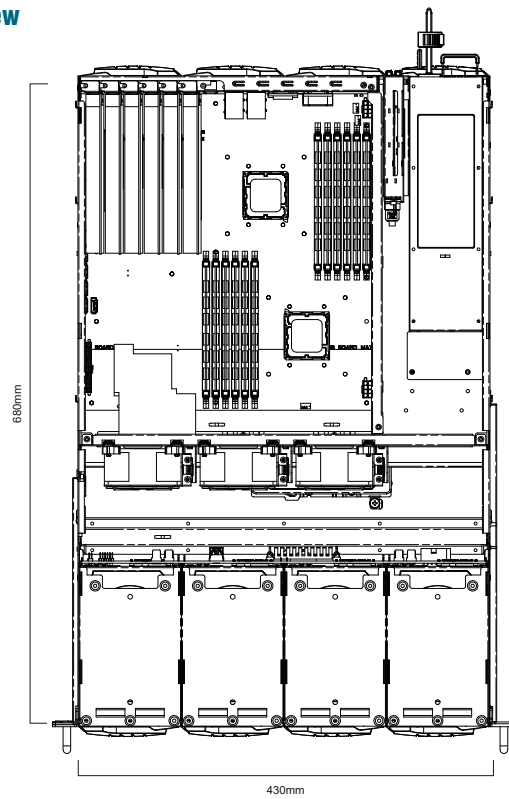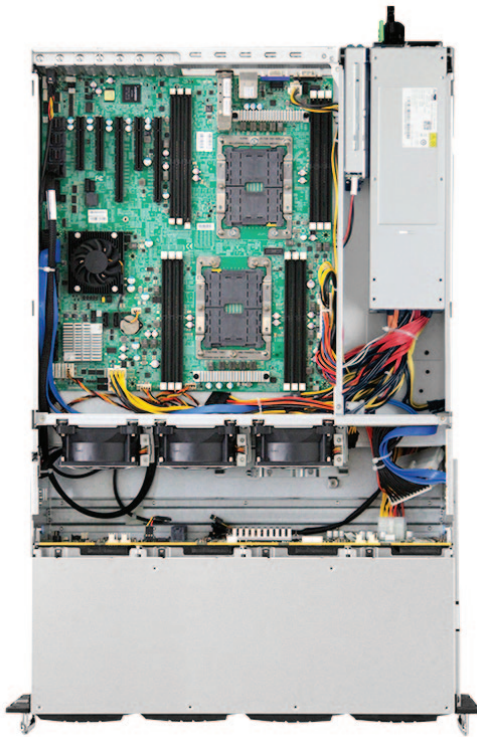

(Power supply is optional. Motherboard is not included.)

## Ordering Information

SKU Number	Description
XE1-4BT00-01	4U 36x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 1200W CRPS redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, front 4U24 SAS 12G expander controller on backplane (3X series) + rear 2U12 SAS 12G expander controller on backplane (3X series)
XE1-4BT00-05	4U 36x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 1200W CRPS redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, front 4U24 SAS 12G expander controller on backplane (35X series) + rear 2U12 SAS 12G expander controller on backplane (35X series)