


# Delock PCI Express x4 Card > 1 x internal NVMe M.2 Key M 110 mm with heat sink - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by one M.2 slot. An M.2 SSD in format 22110, 2280, 2260 and 2242 can be connected. By the heat sink, which can be positioned on different applicable positions, can be ensured a good heat dissipation of the memory module.

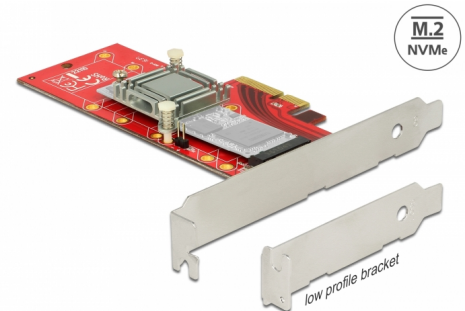

**Item no. 89577**

EAN: 4043619895779

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Specification

- Connectors:  
internal:  
1 x 67 pin M.2 key M slot  
1 x PCI Express x4, V4.0  
1 x 2 pin LED pin header male
- Interface: PCIe
- Supports M.2 modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Data transfer rate up to 64 Gbps
- Supports M.2 modules with up to 3.3 V / 5 A
- Supports NVM Express (NVMe)


## System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

## Package content

- PCI Express card
- Low profile bracket
- Heat sink
- Mounting material
- User manual

## Images

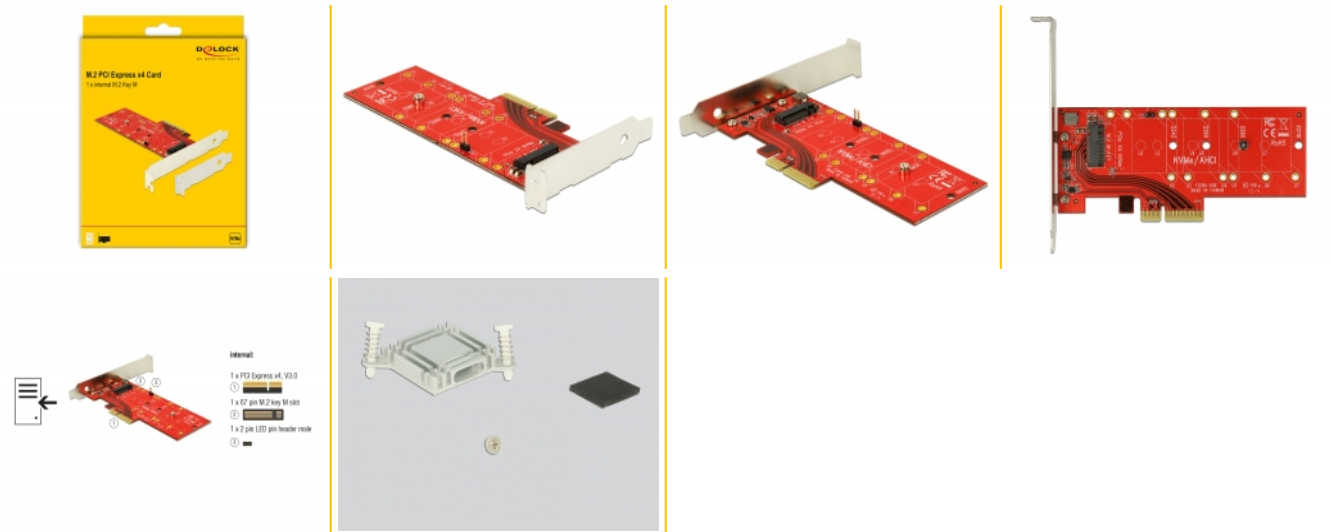

## General

|   |  |
|---|--|
| Form factor:                                    | Low Profile  |
| Function:                                       | NVM Express (NVMe)   |
| Supported operating system:                     | Linux Kernel 3.3 or above<br>Linux Kernel 4.x or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 7 32-Bit<br>Windows 7 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit |
| Slot:   | PCIe   |
| Supported module:                               | M.2 modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe<br>M.2 modules with up to 3.3 V / 5 A   |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported   |

## Interface

|           |  |
|-----------|--|
| Internal: | 1 x PCI Express x4, V3.0<br>1 x 2 pin LED pin header male<br>1 x 67 pin M.2 key M slot |
|-----------|--|

## Technical characteristics

|                     |               |
|---------------------|---------------|
| Data transfer rate: | up to 64 Gbps |
|---------------------|---------------|