

# **Application:**

- Recommend for Intel® Xeon® Platinum / Gold Family Processor ( Products formerly Skylake ), Socket FCLGA3647
- For Narrow ILM Only
- Active Cooler for 3U Server and up

# **Overall Specification:**

• Dimension: 108 x 80 x 110 mm

Weight: 600 g

Material: Aluminum Heatsink with Heatpipe Embedded

8025 Axial PWM Fan for Heat Exhausting

Convenient Heat Sink Screw captive mounting

Thermal Grease Shin-Etsu 7762 Pre-printed

Support CPU power up to 205 Watts heat dissipation

Includes both Fabric and Non-Fabric Package Carriers

# **Fan Specification:**

Model Number: DF128025BM-PWM

Dimension: 80 x 80 x 25 mmBearing: Ball Type, Double

• Rated Voltage: 12V

Rated Speed:

At Duty Cycle 0~20%: 1000 ± 200 RPM
 At Duty Cycle 50%: 2300 ± 10% RPM
 At Duty Cycle 100%: 4000 ± 10% RPM

Rated Input Power:

At Duty Cycle 0~20%: 0.96 W
At Duty Cycle 50%: 1.44 W
At Duty Cycle 100%: 4.8 W

· Rated Airflow:

At Duty Cycle 0~20%: 12.5 CFM
 At Duty Cycle 50%: 28.8 CFM

At Duty Cycle 100%: 50.0 CFM



#### Rated Static Pressure:

o At Duty Cycle 0~20%: 0.5 mm-H<sub>2</sub>O

o At Duty Cycle 50%: 2.6 mm-H<sub>2</sub>O

o At Duty Cycle 100%: 7.8 mm-H<sub>2</sub>O

#### Rated Acoustical Noise:

o At Duty Cycle 0~20%: 16 dBA


o At Duty Cycle 50%: 30.2 dBA

o At Duty Cycle 100%: 42.2 dBA

#### Lead Wire Pin Out:

- o Pin#1-Black(-)
- o Pin#2- Yellow(+)
- Pin#3- Green(Tachometer/ Signal Output)
- o Pin#4- Blue (PWM)

### Lead Wire Pin Out Diagram :

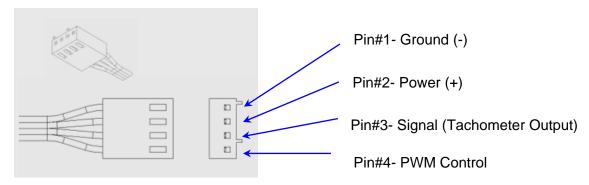

## **Active Cooler B11 Thermal Performance Curve:**

