

Application :

- Recommend for Intel® Xeon® Platinum / Gold Family Processor (Products formerly Skylake), Socket FCLGA3647
- **For Narrow ILM Only**
- Active Cooler for 1U Server


Overall Specification :

- Dimension: 107 x 80.5 x 28 mm
- Weight: 460g
- Material : Copper 1100 Skiving Heatsink
- 8015 Aluminum PWM Blower for Heat Exhausting
- Convenient Heat Sink Screw captive mounting
- Thermal Grease Shin-Etsu 7762 Pre-printed
- Support CPU power up to 165 Watts heat dissipation
- Includes both Fabric and Non-Fabric Package Carriers


Blower Specification:


- Model Number: DB128015BU-PWM / A
- Dimension: Ø80 x 15 mm
- Bearing: Ball Type, Double
- Rated Voltage: 12V
- Rated Speed:
 - At Duty Cycle 0~20%: 1000 ± 200 RPM
 - At Duty Cycle 50%: 4000 ± 10% RPM
 - At Duty Cycle 100%: 7000 ± 10% RPM
- Rated Input Power:
 - At Duty Cycle 0~20%: 0.6 W
 - At Duty Cycle 50%: 3.84 W
 - At Duty Cycle 100%: 19.2 W
- Rated Airflow:
 - At Duty Cycle 0~20%: 3.0 CFM
 - At Duty Cycle 50%: 12.0 CFM
 - At Duty Cycle 100%: 21.0 CFM

- Rated Static Pressure:
 - At Duty Cycle 0~20%: 1.5 mm-H₂O
 - At Duty Cycle 50%: 23.2 mm-H₂O
 - At Duty Cycle 100%: 70.9 mm-H₂O
- Rated Acoustical Noise:
 - At Duty Cycle 0~20%: 16.0 dBA
 - At Duty Cycle 50%: 44.9 dBA
 - At Duty Cycle 100%: 57.1 dBA
- Lead Wire Pin Out:
 - Pin#1-Black(-)
 - Pin#2- Yellow(+)
 - Pin#3- Green(Tachometer/ Signal Output)
 - Pin#4- Blue (PWM)
- Lead Wire Pin Out Diagram :

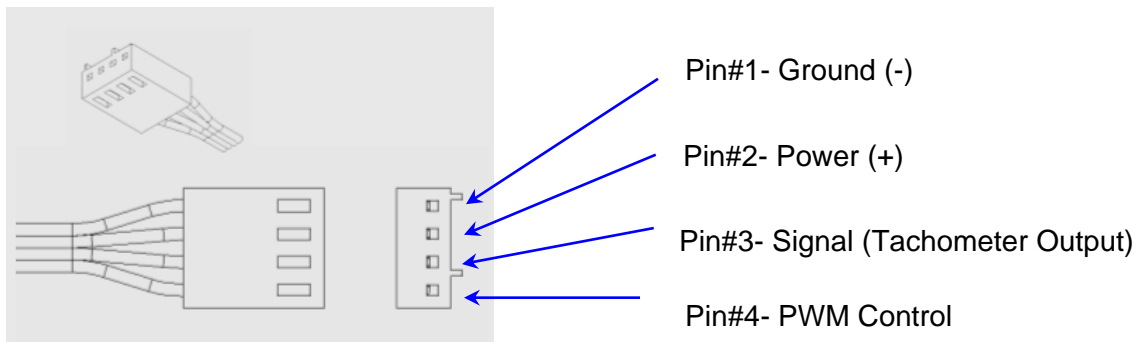

Active Cooler B3 Thermal Performance Curve :

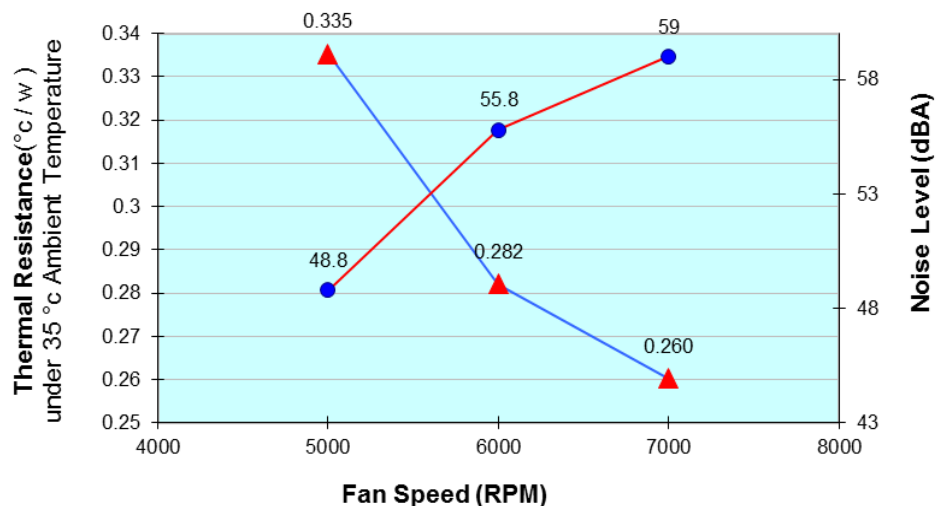

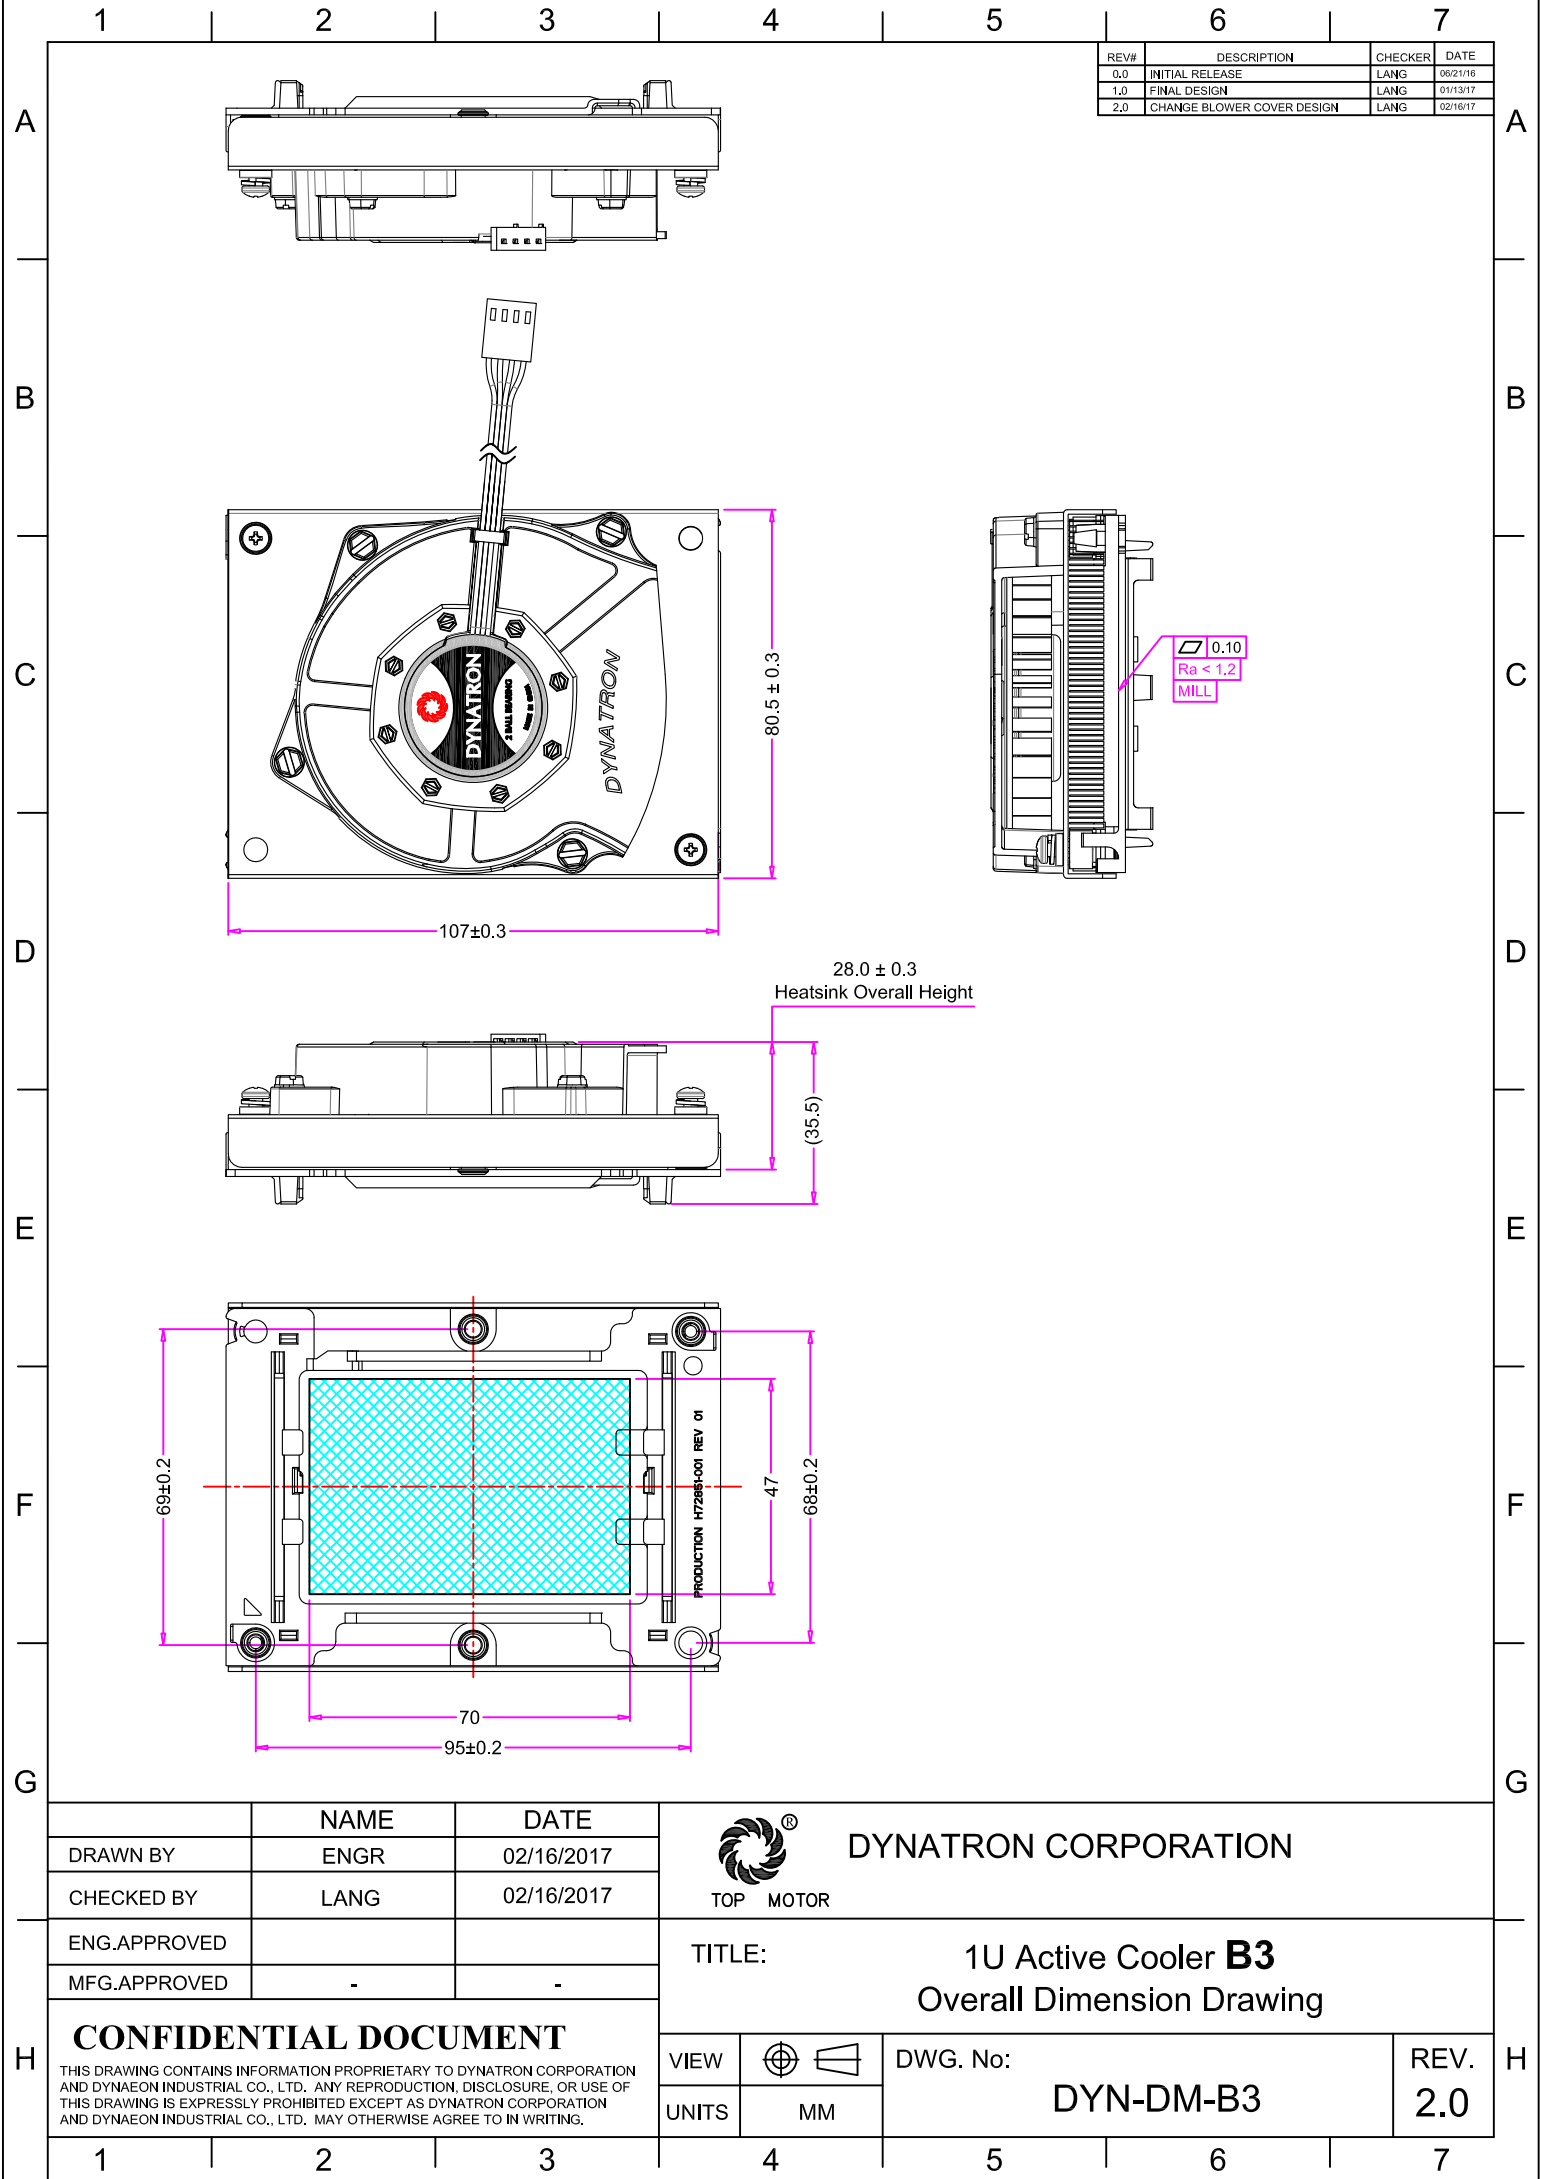

	NAME	DATE
DRAWN BY	ENGR	02/16/2017
CHECKED BY	LANG	02/16/2017
ENG.APPROVED		
MFG.APPROVED	-	-

CONFIDENTIAL DOCUMENT

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT AS DYNATRON CORPORATION AND DYNAEON INDUSTRIAL CO., LTD. MAY OTHERWISE AGREE TO IN WRITING.



DYNATRON CORPORATION

TOP MOTOR

TITLE: 1U Active Cooler **B3**
Overall Dimension Drawing

VIEW	
UNITS	MM

DWG. No: **DYN-DM-B3**

REV. **2.0**