

Application:

- Recommend for Intel® Xeon® Platinum / Gold Family Processor (Products formerly Skylake), Socket FCLGA3647
- For Narrow ILM Only
- Active Cooler for 2U Server and up

Overall Specification:

- Dimension: 108 x 80 x 66 mm
- Weight: 470g
- Material: Aluminum Heatsink with Heatpipe Embedded
- 6025 Axial Fan for Heat Exhausting
- Convenient Heat Sink Screw captive mounting
- Thermal Grease Shin-Etsu 7762 Pre-printed
- Support CPU power up to 205 Watts heat dissipation
- Includes both Fabric and Non-Fabric Package Carriers

Fan Specification:

- Model Number: DF126025BM-PWM
- Dimension: 60 x 60 x 25 mmBearing: Ball Type, Double
- Rated Voltage: 12V
- Rated Speed:
 - At Duty Cycle 0~20%: 1400 ± 200 RPM
 - At Duty Cycle 50%: 3400 ± 10% RPM
 - o At Duty Cycle 100%: 7000 ± 10% RPM
- Rated Input Power:
 - At Duty Cycle 0~20%: 0.90 W
 - At Duty Cycle 50%: 2.04 W
 - At Duty Cycle 100%: 5.40 W
- · Rated Airflow:
 - At Duty Cycle 0~20%: 8.12 CFM
 - At Duty Cycle 50%: 20.31 CFM
 - At Duty Cycle 100%: 40.60 CFM



Rated Static Pressure:

At Duty Cycle 0~20%: 0.58 mm-H₂O
 At Duty Cycle 50%: 3.65 mm-H₂O
 At Duty Cycle 100%: 14.58 mm-H₂O


Rated Acoustical Noise:

At Duty Cycle 0~20%: 16 dBA
At Duty Cycle 50%: 35 dBA
At Duty Cycle 100%: 50 dBA

• Lead Wire Pin Out:

- o Pin#1-Black(-)
- o Pin#2- Yellow(+)
- Pin#3- Green(Tachometer/ Signal Output)
- o Pin#4- Blue (PWM)

Lead Wire Pin Out Diagram :

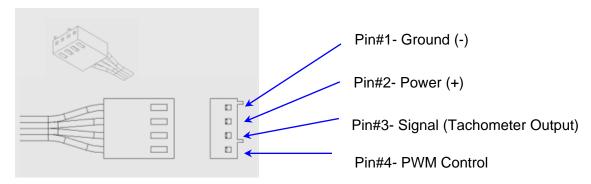

Active Cooler B5 Thermal Performance Curve:

