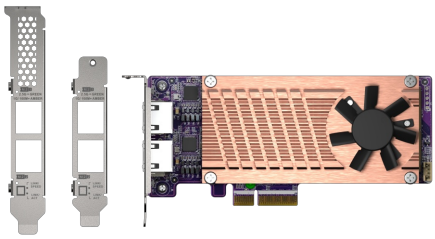

Dual M.2 2280 PCIe SSD & dual-port 2.5GbE expansion card

Controller	Intel Ethernet Controller I225-LM
Connector	2 x M.2 2280 PCIe (Gen3 x2) NVMe SSD slots
PCIe and Lanes	PCIe Gen3 x4
Bracket	Low-profile (default). Low-profile flat and Full-height brackets are also included.
Dimensions (L x W x H)	6.01 × 0.81 × 2.71 inch
Form factor	Low-profile
Cable	RJ-45; over CAT-5e class cable
Note [NAS]	Recommended models (please update your NAS to latest version) Note: The TS-x77 and TVS-x82(T) series only supports installing the QM2 in the System Zone PCIe slot (PCIe slot 1). Please check the M.2 SSD compatibility list and QM2 Installation Guide
Note [PC]	Note: Windows devices: The driver for Intel I225LM is required. Click here to download the Intel driver Linux: Supports Linux Stable Kernel 4.20/5.x. The driver for Intel I225LM is required. Click here to download the Intel driver
Architecture Diagram	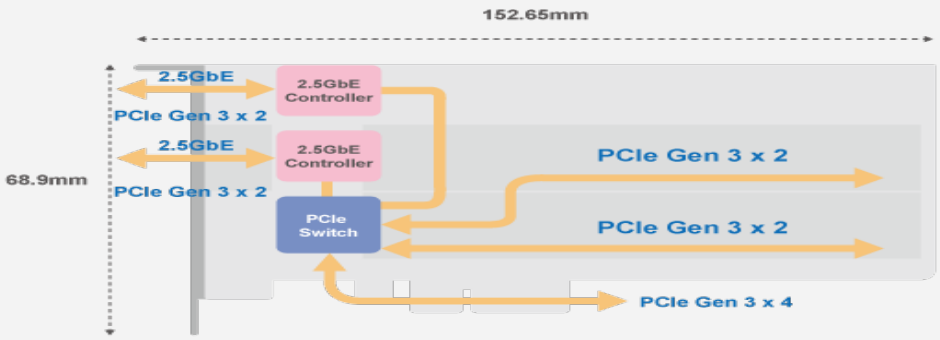
Standard Warranty	1 year

Note: QNAP reserves the right to replace partial parts or accessories if the original is no longer available from its

manufacturer/supplier. Any replacement would be fully tested and verified to meet strict compatibility and stability guidelines and will deliver identical performance to the original.
Product images are for illustrative purposes only and may differ from the actual product. Due to differences in monitors, colors of products may also appear different to those shown on the site.
Designs and specifications are subject to change without notice.