

Mainstream SuperServer SYS-220P-C9R



Key Applications

- High Performance Computing
- Enterprise Server
- Data Center Optimized
- Database Processing and High Density Storage
- Application-Optimized Solutions



Key Features

- Dual sockets P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors; CPU TDP supports Up to 270W TDP; 3 UPI up to 11.2 GT/s;
- Intel® C621A Chipset;
- Up to 4TB 3DS ECC RDIMM, DDR4-3200MHz, Up to 4TB 3DS ECC LRDIMM, DDR4-3200MHz ; - Up to 4TB Intel® Optane™ Persistent Memory 200 Series, DDR4-3200MHz, in 18 DIMM slots (P1-DIMMB2 and P2-DIMMB2 are reserved for Intel® Optane Persistent Memory 200 Series only);
- 4 PCI-E 4.0 x16 Low Profile (LP); 1 PCI-E 4.0 x8 Low Profile (LP); * PCI-E slot#1 is populated with 1x AOC-S3908L-H8IR-16DD-P to support 8x SAS drives;

[More details here](#)



Form Factor	2U Rackmount Enclosure: 437 x 89 x 630mm (17.2" x 3.5" x 24.8") Package: 737 x 279 x 983mm (29" x 11" x 38.7")
Processor	3rd Gen Intel® Xeon® Scalable processors Dual Socket LGA-4189 (Socket P+) supported TDP up to 270W;
Drive Bays	16x 2.5" hot-swap drive bays;
Expansion Slots	Slot 2: PCI-E 4.0 x16 LP Slot 3: PCI-E 4.0 x16 LP Slot 4: PCI-E 4.0 x16 LP Slot 5: PCI-E 4.0 x16 LP Slot 6: PCI-E 4.0 x8 LP
On-Board Devices	Chipset: Intel® C621A Network Connectivity: 2x 1GbE port(s) IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 dedicated IPMI LAN port USB: 2 USB 2.0 port(s) (2 front) 4 USB 3.0 port(s) (4 rear) Video: 1 VGA port(s) Serial Port: 2 COM Port(s) (1 rear; 1 front) DOM: 2 SuperDOM (Disk on Module) port

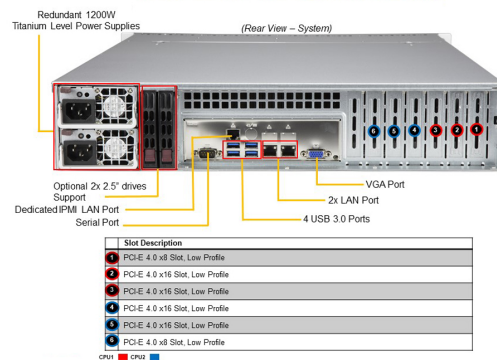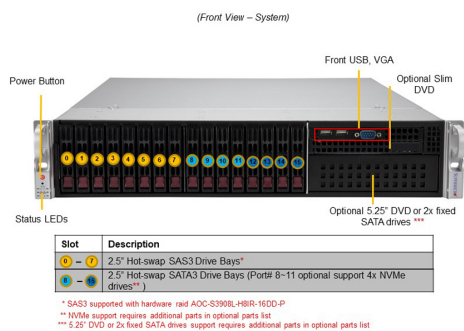

Cooling System

3 heavy duty fan(s)

Power Supply

AC 1200W, Titanium Level, Redundancy, PMBUS 1.2, +12V/+5Vsb, 360x76x40 mm, HF, RoHS/REACH
 Dimension (W x H x L): 76 x 40 x 336 mm
 Output Type: Gold Finger

System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

Management

NMI; SUM; KVM with dedicated LAN; SPM; Intel® Node Manager; SSM; Redfish API; IPMI2.0; Supermicro Out of Band (OOB) License (included in the unit)

PC Health Monitoring

CPU: Monitors for CPU Cores, Chipset Voltages, Memory
 4+1 Phase-switching voltage regulator
 FAN: Fans with tachometer monitoring
 Status monitor for speed control
 Pulse Width Modulated (PWM) fan connectors
 Temperature: Monitoring for CPU and chassis environment
 Thermal Control for fan connectors

Dimensions and Weight

Height: 3.5" (89 mm)
 Width: 17.2" (437 mm)
 Depth: 24.8" (630 mm)
 Gross Weight: 63 lbs (28.8 kg)
 Net Weight: 38 lbs (17.4 kg)
 Packaging: 11" (H) x 29" (W) x 38.7" (D)
 Available Color: Black

Operating Environment

ROHS: RoHS Compliant
 Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F)
 Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)
 Operating Relative Humidity: 8% to 90% (Non-Condensing)
 Non-operating Relative Humidity: 5% to 95% (Non-Condensing)

Motherboard

[Super X12DPi-N6](#)

Chassis

CSE-213BTS-R1K23LPBP3-1

Parts List - (Items Included)

	Part Number	Qty	Description
Motherboard / Chassis	MBD-X12DPI-N6	1	Super X12DPI-N6 Motherboard
	CSE-213BTS-R1K23LPBP3-1	1	2U Chassis
Add-on Card / Module	AOC-S3908L-H8IR-16DD-P	1	8 int 12Gb/s ports, x8 Gen4, ROC - LP, 16 HDD w/ exp,RoHS
Backplane	BPN-SAS3-213A-N8	1	16-port 2U SAS3 12Gbps hybrid backplane, support up to 8x 2.5-inch SAS3/SATA3 HDD/SSD and 8x SAS3/SATA3/NVMe Storage Devices
Cable 1	CBL-SAST-0508-01	2	Internal Mini-SAS to Mini-SAS HD 50cm w/ SB, 30AWG
Cable 2	CBL-SAST-0508-02	2	Internal Mini-SAS to Mini-SAS HD 50cm w/ SB, 30AWG
Cable 3	CBL-SAST-1264-100	1	Slimline x8 (STR) to 2x MiniSAS HD x4,65CM,100 OHM,RoHS
Drive Tray(s)	MCP-220-00007-01	1	Black USB/COM port tray for SC825, 836
Parts	MCP-260-00042-0N	1	STD I/O shield for X9 socket R server MB with Gasket.
Manual	MNL-2243-QRG	1	SYS-220P-C9R(T) Quick Reference Guide
Software	SFT-OOB-LIC	1	License key for enabling OOB BIOS management
Heatsink / Retention	SNK-P0078P	1	2U Passive CPU Heat Sink for X12 Generation Intel Whitley and Cedar Island Platforms
Heatsink / Retention	SNK-P0078PC	1	2U Passive CPU Heat Sink w/ a Side Air Channel for X12 Generation Intel Whitley and Cedar Island Platforms
*Power Supply	PWS-1K23A-1R	2	AC-DC 1200W, Titanium Level, Redundancy, 1U, PMBUS 1.2, +12V/+5Vsb, 336x76x40 mm,HF,RoHS/REACH
*Power Distributor	PDB-PT829-S8824	1	PDB with 23pairs input connectors for SC829B216B
*Cable 4	CBL-0071L	1	ROUND 16 TO 16 PIN RIBBON FP CABLE 30"L, LF
*Cable 5	CBL-0217L	1	16PIN CNTL PANEL CONVERTER CBL FOR SC826,PBF
*Cable 6	CBL-PWCD-0160-IS	2	PWCD,US,NEMA5-15P TO IEC60320 C13,6FT,16AWG,RoHS/REACH
*Cable 7	CBL-PWEX-1069	3	PWEX,FAN,1X4/P2.5 TO 1X4/P2.54,30CM,22AWG,5A/pin,RoHS
*FAN 1	FAN-0206L4	3	80x80x38 mm, 13.5K RPM, Middle Cooling Fan for 2U and above Servers
*Front Panel	FPB-FP826-D	1	Front control board Dual color LED(FP826-D)forSC826,213,216,219
*Drive Tray(s)	MCP-220-00009-01	1	Black 5.25"; drive tray w/o rail (square pattern)
*Drive Tray(s)	MCP-220-00023-01	1	Black USB dummy tray support 1x 2.5" slim HDD for SC825, 836
*Drive Tray(s)	MCP-220-00047-0B	16	Black gen 3rd hot-swap 2.5inch HDD tray
*Rear Window	MCP-240-82608-0N	1	216B/826B LP rear window,RoHS/REACH,PBF
*Peripheral Drive1	MCP-290-00007-01	1	Black DVD dummy cover for SC825, 836
*Rail Set	MCP-290-00053-0N	1	Rail set, quick/quick, default for 2,3U 17.2";W
*Rail Set	MCP-290-00060-0N	1	Threaded rail adapter default for round hole rack
*Air Shroud	MCP-310-29001-0N	1	SC825/826/216/213 Intel DP X9,X8 air shroud 13.68x13/12x13
*Front Panel	TB826	1	Front panel adaptor board (TB826) forSC826,213,216,219

Notes:

1. Parts with * are inside the chassis
2. Excessive parts might not be shipped, including but not limited to excessive drive trays, fans, riser brackets, air shrouds, IO shields, cables.....etc.

Optional Parts List

	Part Number	Qty	Description
BTR kit for AOC-S3108L-H8IR or AOC-S3108L-H8IR-16DD with SYS-220P-C9R	1x BTR-TFM8G-LSICVM02 and 1x BKT-BBU-BRACKET-05 with AOC-S3108L-H8IR or AOC-S3108L-H8IR-16DD	1	SuperCap and mounting bracket used for SAS raid controllers
BTR kit for AOC-S3908L-H8IR-16DD-P and AOC-S3916L-H16R-32DD with SYS-220P-C9R	1xBTR-CVPM05 and 1x BKT-BBU-BRACKET-05 with AOC-S3908L-H8IR-16DD-P and AOC-S3916L-H16R-32DD	1	SuperCap and mounting bracket used for SAS raid controllers
BTR kit for Broadcom/LSI AOC-SAS3-9361-16I with SYS-220P-C9R	1xBTR-TFM4G-LSI00418 and 1x BKT-BBU-BRACKET-05 used with Broadcom/LSI AOC-SAS3-9361-16I	1	SuperCap and mounting bracket used for SAS raid controllers
Optional Gen3 8-ports SAS Raid controller kit for SYS-220P-C9R	AOC-S3108L-H8IR or AOC-S3108L-H8IR-16DD + 2x CBL-SAST-0531-01	1	to convert system SATA ports# 8~15 to SAS drive support; There are two raid controllers in the system and each raid controller supports 8x SAS drives
Optional Gen3 16-ports SAS Raid controller kit for SYS-220P-C9R	AOC-SAS3-9361-16I and 4x CBL-SAST-0593-01 or 4x CBL-SAST-0531-01	1	to use one raid controller to support all 16 drives bays, the default AOC-S3908L-H8IR-16DD-P raid controller is not used
Optional Gen4 16-ports SAS Raid controller kit for SYS-220P-C9R	1xAOC-S3916L-H16R-32DD and 2x CBL-SAST-1264-100;	1	to use one raid controller to support all 16 drives bays, the default AOC-S3908L-H8IR-16DD-P raid controller is not used
Optional parts needed to support 2x fixed NVMe drives	1x MCP-220-00160-0N (Dual 2.5" Drive BKT) and 1x CBL-SAST-0953 (Slimline x8 to PCIe 2x SFF-8639 Power)	1	1x MCP-220-00160-0N can support 2x NVMe fixed drives in 1x 5.25 inch drive bay and 1x CBL-SAST-0953 can support 2x 2.5 inch NVMe drives
Optional parts needed to support 2x fixed SATA drives	1x MCP-220-00160-0N (Dual 2.5" Drive BKT), 2x CBL-0044L (SATA CABLE 61CM FLAT S-S PBF.26AWG flat) and 1x CBL-0082L (Y split , big 4 pin to two RA SATA power extension 15cm, 18AWG)	1	1x MCP-220-00160-0N can support 2x 2.5 inch fixed drives in 1x 5.25 inch drive bay, 1x CBL-0044L can support 1x 2.5 inch SATA drives and 1x CBL-0082L can support 2x 2.5 inch SATA drives
Optional parts needed to support 4x hotswap NVMe drives	2x CBL-SAST-0821-1 (SLIMLINE x8 (LE) to 2x Oculink x4, 46/50CM, 85 OHM, RoHS)	1	1x CBL-SAST-0821-1 can support can support 2x 2.5 inch hotswap NVMe drives, system can support Max. 4x NVMe drives (hotswap and fixed combined) only