

Storage SuperServer SSG-620P-ACR12H



Form Factor	2U Rackmount Enclosure: (17.3" x 3.5" x 25.5") Package: (27" x 12" x 35")
Processor	3rd Gen Intel® Xeon® Scalable processors Dual Socket LGA-4189 (Socket P+) supported TDP up to 270W; 3 UPI
System Memory	16 DIMM slots Up to 18TB Intel® DCPMM, DDR4-2666MHz Up to 4TB ECC RDIMM/LRDIMM, DDR4-3200MHz
Drive Bays	12x 3.5" hot-swap SATA3/SAS3 drive bays; 4x 3.5" NVMe hybrid; 4x 2.5" NVMe hybrid; Optional RAID support via RAID/HBA controller AOC
Expansion Slots	Slot 2: PCI-E 4.0 x16 LP Slot 3: PCI-E 4.0 x16 LP Slot 4: PCI-E 4.0 x16 LP Slot 5: PCI-E 4.0 x16 LP Slot 6: PCI-E 4.0 x8 LP Note: PCIe slot 1 is occupied by the Storage Controller
On-Board Devices	Chipset: Intel® C621A Network Connectivity: 2x 10GbE BaseT with Intel® X550 IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 Dedicated IPMI LAN port 2 RJ-45 10Gbase-T ports USB: 4 USB 3.0 port(s) (4 Rear_USB) Video: 1 VGA port(s) Serial Port: 1 COM Port(s) (1 rear) DOM: 2 SuperDOM (Disk on Module) port

Key Applications


- Enterprise Server
- iSCSI SAN
- HPC, Data Center
- Database Processing & Storage
- Corporate Database

Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- 16 ECC DDR4-3200: LRDIMM/RDIMM + 2 Intel® Optane™ Persistent Memory Dedicated Slots;
- 2x 10GbE;
- 12x 3.5" hot-swap hybrid SATA/SAS drive bays (4 NVMe Hybrid Ports); 2 rear SATA 2.5" slots; onboard 1 M.2 NVMe;
- 3 heavy duty fans with optimal fan speed control; 1 Air Shroud;
- Broadcom® 3916 controller;

[More details here](#)



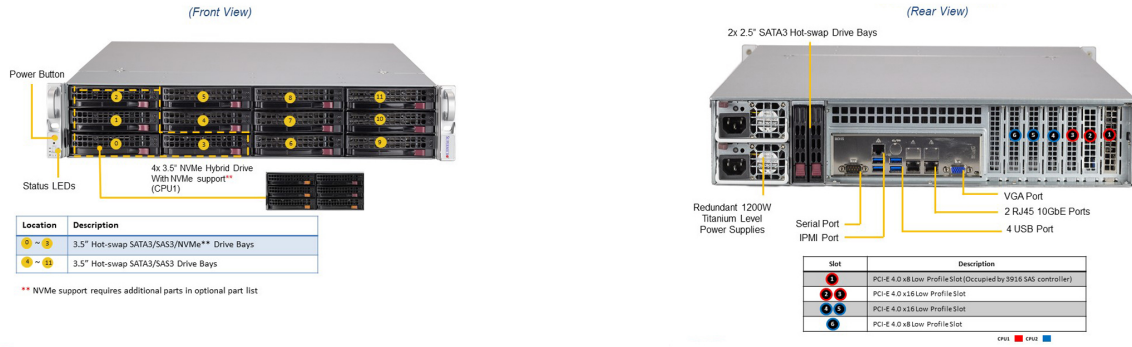






Cooling System	3x 8cm heavy duty fan(s)
Power Supply	AC 1200W, Titanium Level, Redundancy, PMBUS 1.2, +12V/+5Vsb, 360x76x40 mm, HF, RoHS/REACH Dimension (W x H x L): 76 x 40 x 336 mm Output Type: Gold Finger
System BIOS	BIOS Type: AMI 128MB SPI Flash EEPROM
Management	SuperDoctor® 5; Watch Dog; NMI; SUM; IPMI 2.0
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 4+1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Height: 3.5" Width: 17.3" Depth: 25.5" Gross Weight: 61 lbs (27.7 kg) Net Weight: 34 lbs (15.4 kg) Packaging: 12" x 27" x 35" Available Color: Black
Operating Environment	ROHS: RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	Super X12DPI-NT6
Chassis	CSV-826BTS-R1K23LPBP2

Parts List - (Items Included)			
	Part Number	Qty	Description
Motherboard / Chassis	MBD-X12DPI-NT6	1	Super X12DPI-NT6 Motherboard
	CSV-826BTS-R1K23LPBP2	1	2U Chassis
Add-on Card / Module	AOC-S3916L-H16IR-32DD-O	1	16 int 12Gb/s ports, x8 Gen4, ROC - LP, 32 HDD w/ exp,RoHS
Backplane	BPN-SAS3-LA26A-N12	1	2U 12-Slot LFF Backplane Supports 12 x SAS3/SATA3/NVMe4 Storage Devices with 1x(2x4) + 4x(1x4) power connectors, co-lay with BPN-SAS3-LA26A-N12,HF,RoHS
Cable 1	CBL-CDAT-0728	1	4 Pin to 4 Pin I2C Cable, 65cm, 26AWG, 4 Wires, Pinout 1-1
Cable 2	CBL-SAST-1249-100	1	Slimline x8 (STR) to 2x Slimline x4 (STR),50CM,100 OHM,
Cable 3	CBL-SAST-1281-100	1	Slimline x8 (STR) to 2x Slimline x4 (STR),80CM,100 OHM,
Parts	MCP-260-00042-0N	1	STD I/O shield for X9 socket R server MB with Gasket.
Software	SFT-OOB-LIC	1	License key for enabling OOB BIOS management
Heatsink / Retention	SNK-P0078P	1	2U Passive CPU Heat Sink for X12 Generation Intel Whitley and Cedar Island Platforms
Heatsink / Retention	SNK-P0078PC	1	2U Passive CPU Heat Sink w/ a Side Air Channel for X12 Generation Intel Whitley and Cedar Island Platforms
*Power Supply	PWS-1K23A-1R	2	AC-DC 1200W, Titanium Level, Redundancy, 1U, PMBUS 1.2, +12V/+5Vsb, 336x76x40 mm,HF,RoHS/REACH
*Power Distributor	PDB-PT826-8824	1	PDB with longer 24pin for SC826B
*Cable 4	CBL-CDAT-0607	1	[NR] FRONT CNTL,20 TO 20 PIN, P0.5, FFC,FLAT, 23.5CM, STD
*Cable 5	CBL-PWCD-0160-IS	2	PWCD,US,NEMA5-15P TO IEC60320 C13,6FT,16AWG,RoHS/REACH
*Cable 6	CBL-PWEX-1078	3	PWEX,FAN,1X4/P2.5 TO 1X4/P2.54,20CM,22AWG,5A/PIN,RoHS
*FAN 1	FAN-0166L4	3	80x80x38 mm, 13.5K RPM, Optional Middle Cooling Fan for 2U Ultra Series Servers (Hot-swappable Version of FAN-0162L4)
*FAN 2	FAN-0206L4	3	80x80x38 mm, 13.5K RPM, Middle Cooling Fan for 2U and above Servers
*Front Panel	FPB-TB826-T	1	Chassis transfer board for SC826
*Drive Tray(s)	MCP-220-00075-0B	12	Black gen 5.5 hot-swap 3.5" HDD tray
*Rear Window	MCP-240-82608-0N	1	216B/826B LP rear window,RoHS/REACH,PBF
*Rail Set	MCP-290-00053-0N	1	Rail set, quick/quick, default for 2,3U 17.2";W
*Rail Set	MCP-290-00060-0N	1	Threaded rail adapter default for round hole rack
*Air Shroud	MCP-310-29001-0N	1	SC825/826/216/213 Intel DP X9,X8 air shroud 13.68x13/12x13

Notes:

- Parts with * are inside the chassis
- Excessive parts might not be shipped, including but not limited to excessive drive trays, fans, riser brackets, air shrouds, IO shields, cables.....etc.

Optional Parts List			
	Part Number	Qty	Description
3916 Cache Protection	BKT-BBU-BRACKET-05	1	Remote Mounting Bracket for LSI BBUs
	BTR-CVPM05	1	Broadcom 05-50039-00 CacheVault w/ 24" Remote Extender
Bezel	MCP-210-82601-0B 	-	Black Front Bezel for 826 chassis
Converter Tray	MCP-220-00043-0N 	-	Black hot-swap gen 4 3.5 to 2.5 HDD tray
IPASS Cable	CBL-SAST-0388L-02 	-	30AWG Ipass to 4SATA 90/90/70/70CM W/ 90CM SB
Network Cards	AOC-S25G-M2S	-	Standard LP, 2x 25GbE SFP28, Mellanox ConnectX-4 LX EN
	More	-	AOC Compatibility Matrix (Select Storage & X12)
	AOC-SGP-I2	-	Standard LP 2-port GbE, Intel 82575
	AOC-S40G-I2Q	-	Standard LP 2-port 40GbE controller, Intel Fortville XL710
NVMe Support	CBL-SAST-1248-85	2	[NR] Slimline x8 (LE) to Slimline x8 (STR),46CM,85 OHM,RoHS
	MCP-220-00116-0B 	4	Black gen-5.5 tool-less 3.5-to-2.5 NVME converter drive tray,RoHS/REACH
Power Cord	CBL-PWCD-0300-IS	-	PWCD,US,IEC60320 C14 TO C13,6FT,18AWG,RoHS/REACH
	CBL-PWCD-0579	-	Power Cord Type IEC (C14 to C13) 6 ft (14AWG), 15A, 250V
	CBL-PWCD-0579-1	-	Power Cord Type IEC (C14 to C13) 6 ft (14AWG), 15A, 250V
Toolless Converter Tray	MCP-220-00118-0B 	-	Black gen-5.5 tool-less 3.5-to-2.5 converter drive tray,RoHS/REACH
TPM Module	AOM-TPM-9671V	-	SPI capable TPM 1.2 with Infineon 9670 controller with vertical form factor
	AOM-TPM-9670V	-	SPI capable TPM 2.0 with Infineon 9670 controller with vertical form factor