





Front View

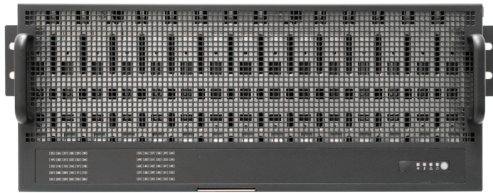

Features

- 4U high-density JBOD supports 60 hot-swap 3.5" SAS/SATA drive bays
- IPMI compliance BMC Intelligent Enclosure Management
- Hot swap design for maintenance and management
- Enclosure Cable Management Kit
- Optimized for 1000mm depth rackmount server cabinet

Rear View

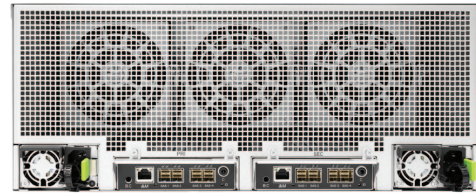

Specifications

General	Number of Expander	Single/Dual
	Expander Chip	Broadcom SAS35X40
	Host/Expansion Interface	4 x Mini-SAS HD (SFF-8644) per expander module
Drives Supported	Drive Interface	12Gb SAS (Single/Dual) / 6Gb SATA (Single)
	Form Factor	3.5"
Administration / Management	Admin/Firmware Upgrade	• In-band & Serial port interface • IEM port
	LED Indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	60
	Cooling	6 x 120x38mm hot swap fans
	Power Supply	• 800W 1+1 80+ Platinum/Titanium • 1200W 1+1 80+ Platinum • 1300W 1+1 80+ Titanium
	Power Entry	Dual AC inlet

Electrical and Environmental	Universal A/C Input	Platinum/Titanium 800W: • 100~127V~, 50/60Hz, 10A • 200~240V~, 50/60Hz, 5A Platinum 1200W: • 100~127V,50/60Hz,10A; Total Power 800W • 200~240V,50/60Hz,8A; Total Power 1200W Titanium 1300W: • 100-127V~,50/60Hz,12A • 200-240V~,50/60Hz, 8.5A
	Operating Environment	• Temperature : 0°C to 35°C • Relative humidity : 20% to 80%
	Non-operating Environment	• Storage temperature : -20° to 60°C • System relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H)	mm : 434 x 750 x 176 inches : 17.1 x 29.5 x 6.9
	Gross Weight (w/ PSU, Rail, & Pallet; w/o Disks)	kgs : 58.2 lbs : 128.3
	Packaging Dimensions (W x D x H)	mm : 650 x 1140 x 530 inches : 25.6 x 44.9 x 20.9
	Mounting	Standard : 37" tool-less rail Option : Cable Management Kit

Ordering Information

SKU Number	Description
XJ1-40604-01	4U 60x 3.5" HS bays, HS JBOD w/ single SAS 12G expander controller, single BMC, tool-less HDD tray, 800W 1+1 HS redundant 80+ Platinum, tool-less rail kit
XJ1-40604-02	4U 60x 3.5" HS bays, HS JBOD w/ dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 800W 1+1 HS redundant 80+ Platinum, tool-less rail kit
XJ1-40604-03	4U 60x 3.5" HS bays, HS JBOD w/ single SAS 12G expander controller, single BMC, tool-less HDD tray, 800W 1+1 HS redundant 80+ Titanium, tool-less rail kit
XJ1-40604-04	4U 60x 3.5" HS bays, HS JBOD w/ dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 800W 1+1 HS redundant 80+ Titanium, tool-less rail kit
XJ1-40604-05	4U 60x 3.5" HS bays, HS JBOD w/ single SAS 12G expander controller, single BMC, tool-less HDD tray, 1200W 1+1 HS redundant 80+ Platinum, tool-less rail kit
XJ1-40604-06	4U 60x 3.5" HS bays, HS JBOD w/ dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 1200W 1+1 HS redundant 80+ Platinum, tool-less rail kit
XJ1-40604-07	4U 60x 3.5" HS bays, HS JBOD w/ single SAS 12G expander controller, single BMC, tool-less HDD tray, 1300W 1+1 HS redundant 80+ Titanium, tool-less rail kit
XJ1-40604-08	4U 60x 3.5" HS bays, HS JBOD w/ dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 1300W 1+1 HS redundant 80+ Titanium, tool-less rail kit