



ToughArmor MB601M2K-1B ICY DOCK®

M.2 PCIe NVMe SSD Hot-Swap Mobile Rack for 3.5" Bay www.icydock.com

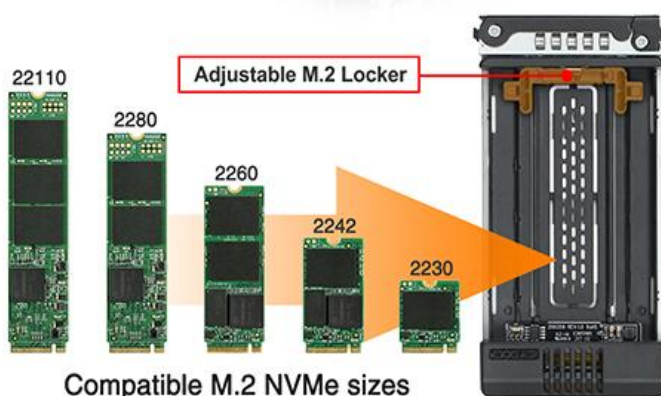

Full Metal Construction
Protects from bumps & drops

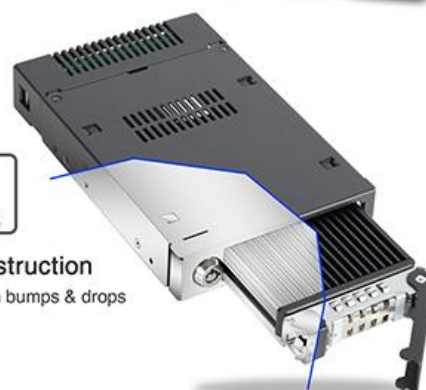

Supports Full NVMe Bandwidth
Transfer speed up to 32Gb/s



ToughArmor MB601M2K-1B Features & Specs

- Fits 1x M.2 NVMe SSD of all lengths, 30mm 2230, 42mm 2242, 60mm 2260, 80mm 2280, and 110mm 22110
- Adjustable drive locker holds all length drives securely
- Installs into any standard external 3.5" device bay or floppy bay
- Uses a U.2 port (SFF-8639) to connect, requires NVMe host
- Supports the full NVMe bandwidth specification of 32 Gbps
- Ruggedized full-metal enclosure meeting flammability requirements
- Integrated heat sink and ample ventilation for excellent passive cooling
- 2-segment key lock for additional physical security
- Eagle-hook tray latch securely holds the tray inside the enclosure
- EMI Grounding – protects hard drives from electrical damage
- Anti-Vibration Technology (AVT) reduces noise & protects against environmental damage
- Active Power Technology (APT) saves power by shutting the device down when no drive is installed.
- Industry leading 3-year warranty against all defects
- Complimentary support from US-based technical support agents

Model Number	MB601M2K-B
Color	Black
Compatible Drive Type	M.2 PCIe NVMe SSD
Number of Drives	1
Support Drive Size	2230 / 2242 / 2260 / 2280 / 22110
Device Interface	1 x U.2 connector (SFF-8639)
Power Input	Via U.2 (SFF-8639)
Device Fit	1 x External 3.5" Drive Bay
Transfer Rate	Up to 32Gbps
Support Hot-Swap	Yes
Drive Cooling	Metal heat dispersion with passive cooling
Material	Metal with ABS Plastic
Dimension (W x H x D)	168.7 x 101.2 x 25.4
Product Net Weight	Device, Manual, Screws, Keys
Package Contents	546g